


# ESR INSTALLATION SYSTEM FRAME II

- allows quick and accurate installation of shower trays flush with the floor
- versatile thanks to horizontally and vertically adjustable feet
- optimum sound insulation due to integrated sound insulation band, rubber mounting profile, corner support rubbers and noise-decoupled feet
- special waste fitting required for ESR II

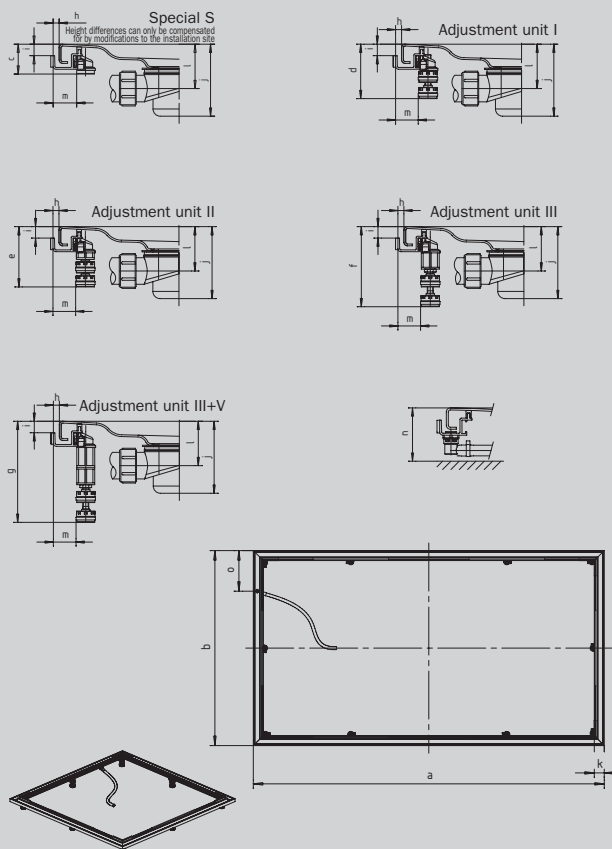

Installed height (non-adjustable)	c	49 mm
Installed height	d	63-77 mm
Installed height	e	75-99 mm
Installed height	f	97-131 mm
Installed height	g	131-164 mm
Space for wall tile	h	10 mm
Space for floor tile	i	20 mm
Height shower tray with siphon	Special waste fitting	Tray depth** + 95 mm
	Special waste fitting 60 mm	Tray depth** + 75 mm
	Special waste fitting Plus	Tray depth** + 105 mm
	Special waste fitting vertical	
Frame width*	k	48,5 mm
Siphon connection height	Special waste fitting	Tray depth** + 55 mm
	Special waste fitting 60 mm	Tray depth** + 45 mm
	Special waste fitting Plus	Tray depth** + 60 mm
	Special waste fitting vertical	
Recess to foot of frame	m	35 mm
Installation height pipe connection with shower tray	n	80 mm
Drain connection	o	210 mm

Model No.	75/80	80/80	70/90	75/90	80/90	90/90	75/100	80/100	90/100	100/100	80/110	90/110	70/120	75/120	
External length*	a	820	820	920	920	920	1020	1020	1020	1020	1120	1120	1220	1220	
External width*	b	770	820	720	770	820	920	770	820	920	1020	820	920	720	770

Model No.	80/120	90/120	100/120	120/120	80/130	90/130	100/130	70/140	75/140	80/140	90/140	100/140	70/150	75/150	
External length*	a	1220	1220	1220	1320	1320	1320	1420	1420	1420	1420	1420	1520	1520	
External width*	b	820	920	1020	1220	820	920	1020	720	770	820	920	1020	720	770

Model No.	90/150	100/150	150/150	70/160	75/160	90/160	100/160	70/170	75/170	90/170	100/170	80/180	90/180	100/180	
External length*	a	1520	1520	1520	1620	1620	1620	1720	1720	1720	1720	1820	1820	1820	
External width*	b	920	1020	1520	720	770	920	1020	720	770	920	1020	820	920	1020

\*without soundproofing tape

\*\*tray depth corresponds to dimension „c“ of the desired shower tray

**Take account of required plaster floor recess, dimensions a and b plus 8 mm.**

If the installed height is low (less than dimension „J“ + 5mm) a floor recess must be made.

We recommend a non-return valve be fitted in the waste pipe.

Subject to technical alterations.